

OSCILLATING SCREEN FOR ENAMELS


VSL 800 - 900 - 1200 - 1500 2/Y

TECHNICAL FEATURES

DATA	U.M.	1500	1200	900	800
Number screening nets	no.	2			
Screening surface	m²	1.575	0.932+0.932	0.587+0.587	0.36+0.36
Power	kW	2,75	0.48	0.73	1.25
Centrifugal force	N	25.000	12,753	10,300	5,886
Motorised vibrator	Type	MV 155/2	MV 145/2	MV 125/2	MV 116/2
Weight	N	3.100	1913	1422	785

STRUCTURAL FEATURES

- AISI 304 stainless steel trolley with swivel wheel
- Telescopic pipes for screen height adjustment
- Parts in contact with the product: AISI 304 L – roughness $\leq 0.5 \text{ Ra}$
- Protection rating: IP65
- Upper strip with rubber buffer opening
- Clamping system: half-rings with bolts

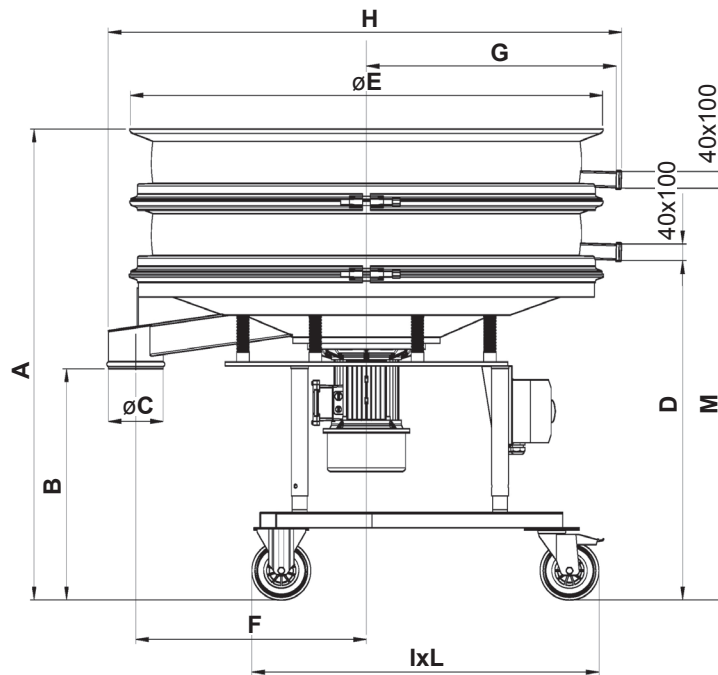

Mod./Size	A	B	ØC	D	ØE	F	G	H	I	L	M
800 2/Y	1080 ÷ 1280	600 ÷ 800	76,1	840 ÷ 1040	796	462	431	943	680	740	970 ÷ 1170
900 2/Y	1102 ÷ 1302	580 ÷ 780	101,6	829 ÷ 1029	992	525	529	1119	884	942	981 ÷ 1181
1200 2/Y	1199 ÷ 1399	589 ÷ 789	139,7	866 ÷ 1066	1206	587	636	1307	884	942	1049 ÷ 1249
1500 2/Y	1266-1466	580-780	200	932-1132	1546	870	806	1790	1145	1244	1116-1316

USE

- Screening of ceramic enamels

The information is approximate - The guaranteed values are released by Vibrotech s.r.l. on request-It is forbidden to reproduce the document even partially.

VIBROTECH S.r.l.
 Siège social : Via Racchetta, 2 - int. 20 - 41049 Sassuolo (MO)
 Centre opérationnel : Via Don Pasquino Borghi, 4 - 42013 S. ANTONINO DI CASALGRANDE (RE) - Italie
 Tél : +39 0536 82.37.76- Fax : +39 0536 81.20.09 - www.vibrotech.biz - email : info@vibrotech.biz
 SIREN de Mo 407988 - N° Identification fiscale et Numéro de TVA 03674210368

