

OSCILLATING SCREEN FOR ENAMELS


VSL 600 1/Y ABS

TECHNICAL FEATURES

DATA	U.M.	600 1/Y ABS
Number screening nets	no.	1
Screening surface	m ²	0.264
Power	kW	0.48
Centrifugal force	N	4,198
Motorised vibrator	Type	MV 112/2
Weight	kg	50

STRUCTURAL FEATURES

- AISI 304 stainless steel trolley with swivel wheel
- Telescopic pipes for screen height adjustment
- AISI 304 L stainless steel parts – roughness $\leq 0.5 \text{ Ra}_{\mu}$
- Protection rating: IP65
- Upper thermoformed ABS strip
- Knob-based tightening system

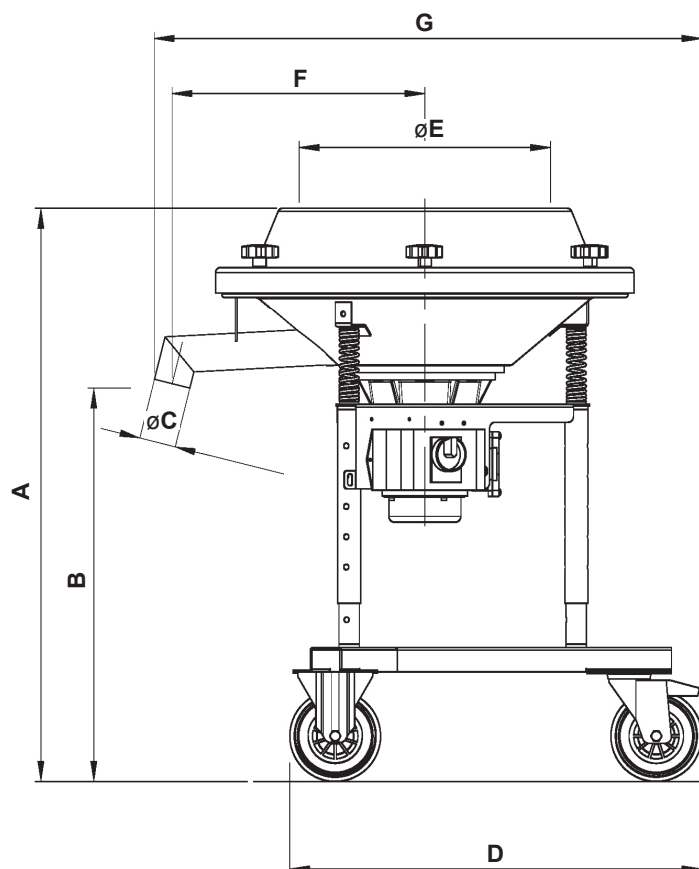

Mod./Size	A	B	øC	D	øE	F	G
600 1/Y	896÷1096	598÷798	60,3	680x740	415 – opening	417	903

USE

- Screening of ceramic enamels

The information is approximate - The guaranteed values are released by Vibrotech s.r.l. on request-It is forbidden to reproduce the document even partially.

VIBROTECH S.r.l.
 Siège social : Via Racchetta, 2 - int. 20 - 41049 Sassuolo (MO)
 Centre opérationnel : Via Don Pasquino Borghi, 4 - 42013 S. ANTONINO DI CASALGRANDE (RE) - Italie
 Tél : +39 0536 82.37.76- Fax : +39 0536 81.20.09 - www.vibrotech.biz - email : info@vibrotech.biz
 SIREN de Mo 407988 - N° Identification fiscale et Numéro de TVA 03674210368

