

OSCILLATING SCREEN FOR ENAMELS


VSL 800 - 900 - 1200 -1500 1/Y

TECHNICAL FEATURES

DATA	U.M.	1500	1200	900	800
Number screening nets	no.	1			
Screening surface	m²	1.575	0.932	0.587	0.36
Power	kW	2,75	1.25	0.73	0.48
Centrifugal force	N	25.000	12,753	10,300	5,886
Motorised vibrator	Type	MV 155/2	MV 145/2	MV 125/2	MV 116/2
Weight	kg	200	135	100	70

STRUCTURAL FEATURES

- AISI 304 stainless steel trolley with swivel wheel
- Telescopic pipes for screen height adjustment
- Parts in contact with the product: AISI 304 L – roughness $\leq 0.5 \text{ Ra}$
- Protection rating: IP65
- Upper strip with rubber buffer opening
- Clamping system: half-rings with bolts

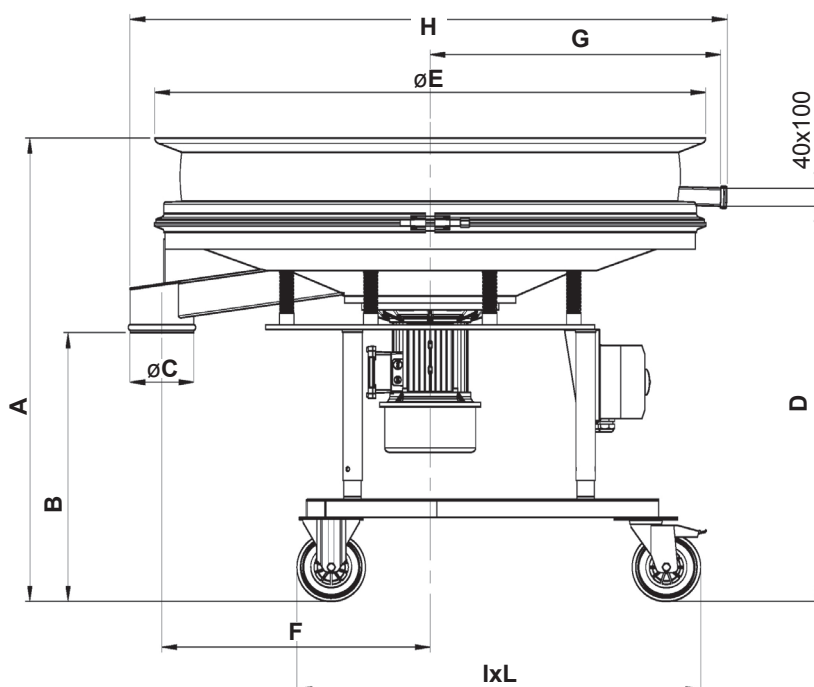

Mod./Size	A	B	øC	D	øE	F	G	H	I	L
800 1/Y	949 ÷ 1145	600 ÷ 800	76,1	840 ÷ 1040	796	462	431	943	680	740
900 1/Y	945 ÷ 1149	580 ÷ 780	101,6	829 ÷ 1029	992	525	529	1119	884	942
1200 1/Y	1015 ÷ 1215	589 ÷ 789	139,7	866 ÷ 1066	1206	587	636	1206	884	942
1500 1/Y	1081-1281	580-780	200	932-1132	1546	870	806	1790	1145	1244

USE

- Screening of ceramic enamels

The information is approximate - The guaranteed values are released by Vibrotech s.r.l. on request-It is forbidden to reproduce the document even partially.